


## SMART FEATURES

- Inline side entry design
- Choke can remain installed in the pipeline for trim changes, huge cost savings for end user
- Reduced torque stem design, lowering cost for actuation components
- Quick and simple maintenance
- Customizable multiple orifice ports to optimize performance, disc style trim
- Solid Tungsten Carbide trim as standard
- Our trim design achieves exceptional shutoff throughout its life
- Replaceable Tungsten Carbide outlet wear sleeve standard
- Large Cv of 30.00
- Large trim positioning visual indicator
- API – M/C (EE-.5), Temp (L/U) as standard
- All other API material classes are available



## CV

- IC1 1" nom body - Max Cv: 23.0
- IC2 2" nom body - Max Cv: 30.0

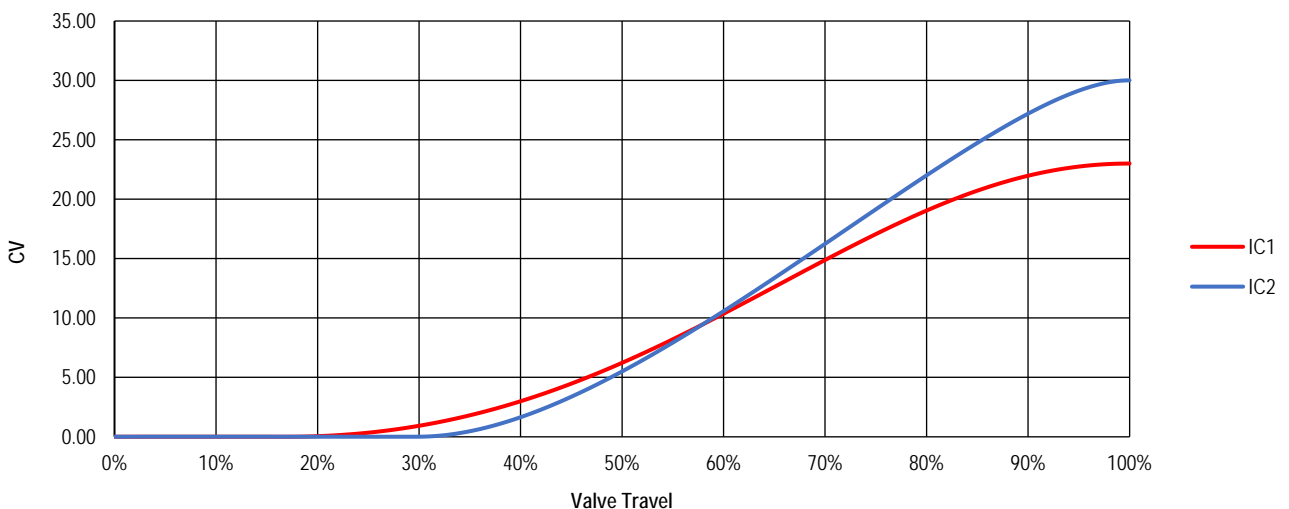

## Operating Load

