


SMART FEATURES

- Top entry, specifically designed for high sand service applications
- 90 deg. travel without any mechanical converter
- Solid Tungsten Carbide trim as standard
- Extended Tungsten Carbide wear sleeve standard and is easily replaceable
- Choke can remain installed in the pipeline for trim changes, huge cost savings for end user
- Quick and simple maintenance
- Customizable multiple orifice ports to optimize performance, disc style trim
- Our trim design achieves exceptional shutoff throughout its life
- Large Cv of 30.00
- API – M/C (EE-.5), Temp (L/U) as standard
- All other API material classes are available



CV

ICS2 - Max Cv: 30.0

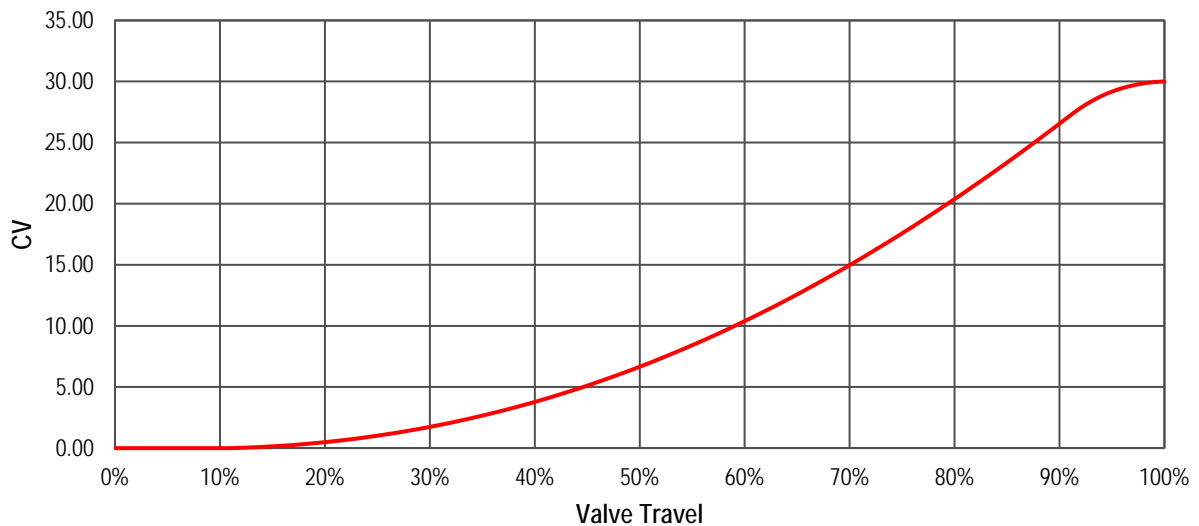

Operating Load

